

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 824 922 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.04.2002 Bulletin 2002/15

(51) Int Cl.⁷: **A61M 5/20**

(21) Application number: **97114271.6**

(22) Date of filing: **19.08.1997**

(54) **An improved cartridge for an injection device**

Verbesserte Kartusche für eine Injektionsvorrichtung

Cartouche améliorée pour un dispositif d'injection

(84) Designated Contracting States:
BE CH DE ES FR GB IT LI NL SE

(30) Priority: **23.08.1996 US 701963**

(43) Date of publication of application:
25.02.1998 Bulletin 1998/09

(73) Proprietor: **Becton Dickinson France S.A.**
F-38800 Le Pont-de-Claix (FR)

(72) Inventors:
• **Olive, Eric**
69003 Lyon (FR)

• **Sams, Bernard**
London N12 8EJ (GB)

(74) Representative: **Gerbino, Angelo et al**
Jacobacci & Partners S.p.A.
Corso Regio Parco, 27
10152 Torino (IT)

(56) References cited:
EP-A- 0 518 416 **US-A- 5 137 516**
US-A- 5 478 316

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The field of the invention relates to injection devices for automatically dispensing premeasured quantities of material, and disposable assemblies therefor.

2. Brief Description of the Prior Art

[0002] Injection devices such as syringes are widely used in the medical and veterinary fields. They are ordinarily employed by trained personnel who are capable of selecting the appropriate medication and administering the required dosage.

[0003] Specialized injection devices have been designed for situations where trained personnel are not available to administer medication. Such devices are usable by persons such as diabetics who self-inject insulin, allergy sufferers who may require an emergency injection of anti-histamines or other medication, and other patients where self-injection is either more convenient or necessary.

[0004] U.S. Patent No. 2,752,918 discloses one type of automatically operated injection device. Upon firing an actuating mechanism of this device, a needle is caused to penetrate the skin, medicament is injected through the bore of the needle, and the needle is retracted. The device includes a first coil spring for causing the needle to be projected beyond a nose piece and a second coil spring which is compressed during this procedure. The second spring, upon release of a clutch mechanism, then automatically urges an ampule and stem rearwardly, causing retraction of the needle.

[0005] U.S. Patent No. 5,137,516 discloses another type of automatically operated injection device. The user first presses the device against the skin in order to move an internal shaft and sleeve assembly. An actuating button is then depressed, causing a button arm to spread the arms of a retention clip. The separation of these arms releases the head of the pusher rod, which is then moved forwardly under the force of a main coil spring. The pusher rod first moves the entire syringe against the force of a syringe spring. Once the needle has penetrated the skin, the syringe plunger is depressed by the pusher rod, causing the syringe to empty. The main spring of the patented device may be recocked upon reloading of a new syringe assembly. Such reloading is accomplished by a force applied by the syringe piston directly upon the pusher rod of the device.

[0006] U.S. Patent No. 5,478,316 discloses a device including a drive assembly and a disposable syringe assembly coupled thereto. The drive assembly includes a constant force spring which urges the syringe assembly in such a manner that the syringe needle is first caused to enter a patient's skin. This step is followed by the in-

jection of fluid through the needle into the patient.

[0007] The syringe assembly of the patented device includes, *inter alia*, a sleeve and a cap. The cap is mounted to one end of the sleeve, and protects the needle prior to use of the device. As the cap does not rotate with respect to the sleeve, it may be grasped by the user during the process of coupling the syringe assembly to the drive assembly.

[0008] The drive assembly of the patented device includes a housing which is coupled to a collar. The collar includes a slot which, during installation of the syringe assembly, is aligned with a longitudinal rib extending radially outwardly from the sleeve. This sleeve can be pushed into the housing of the drive assembly when so aligned, thereby loading the spring. The syringe assembly is then rotated, causing engagement of the push button of the drive assembly with a projection at one end of the sleeve.

[0009] A number of other approaches have been taken for providing automatic injection of various materials. U.S. Patent Nos. 3,797,489, 4,484,910, 4,902,279, 5,114,404 and 5,425,715 provide further examples of this type of device.

SUMMARY OF THE INVENTION

[0010] An autoinjector is provided which includes a drive assembly and a disposable assembly including a sleeve and a syringe. The disposable assembly is removably securable to the drive assembly, as the drive assembly is intended to be reused.

[0011] The drive assembly and disposable assembly are constructed such that the disposable assembly cannot be ejected by the drive assembly until it is moved to the firing position. In other words, the loading of the disposable assembly to the drive assembly must be completed, and the drive assembly fired, before the disposable assembly can be uncoupled from the drive assembly.

[0012] An assembly according to the invention includes a drive assembly including a housing and a drive rod. A spring is provided for resiliently urging the drive rod. The disposable portion of the assembly includes a sleeve and a syringe assembly slidably mounted within the sleeve. The syringe assembly includes a cartridge and a piston slidably mounted within the cartridge. The drive rod is operatively associated with the syringe assembly when the sleeve is mounted within the drive assembly housing, and causes fluid to be expelled from the cartridge when actuated by the user.

[0013] The sleeve is slidably positioned within the housing when an injection is to be made. In order to prevent the sleeve and its contents from being prematurely expelled, one of the sleeve and drive assembly housing is provided with a stop member, while the other is provided with an engagement member. In accordance with a preferred embodiment of the invention, the sleeve includes an elongate rib including a notch which defines

a stop member, while the housing includes a radially inwardly extending pawl which defines the engagement member. The engagement member is positioned to engage the stop member as the sleeve is positioned within the housing, thereby preventing its removal. Removal may be accomplished only after the sleeve has been moved to the firing position, which is preferably accomplished by rotation of the sleeve about its longitudinal axis. Such rotation causes displacement of the engagement member with respect to the stop member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Fig. 1 is a partially exploded, top perspective view of an injection device according to the invention;
 Fig. 2 is an exploded, perspective view of the device;
 Fig. 3 is a sectional view showing the initial step in mounting a new syringe assembly to the drive assembly;
 Fig. 4 is a similar view showing the new syringe assembly partially within the housing of the drive assembly;
 Fig. 5 is a side elevation view showing the coupling of a new sleeve and syringe assembly to the drive assembly;
 Fig. 6 is a side elevation view showing the final step in mounting a new sleeve and syringe assembly to the drive assembly;
 Fig. 7 is a top plan view of the injection device;
 Fig. 8 is a bottom plan view thereof;
 Fig. 9 is a sectional view taken along line 9-9 of Fig. 7;
 Fig. 10 is a bottom plan view of the sleeve of the injection device;
 Fig. 11 is a sectional view thereof taken along line 11-11 of Fig. 10;
 Fig. 12 is a sectional view thereof taken along line 12-12 of Fig. 10;
 Fig. 13 is a top plan view of the sleeve;
 Fig. 14 is a cutaway perspective view showing the insertion of the sleeve into the collar of the drive assembly;
 Fig. 15 is a bottom plan view of the collar;
 Fig. 16 is a top plan view of the collar;
 Fig. 17 is a side elevation view of the collar;
 Fig. 18 is a sectional view taken along line 18-18 of Fig. 17; and
 Fig. 19 is an enlarged, cutaway perspective showing an alternative embodiment of the sleeve adjoining a portion of the collar.

DETAILED DESCRIPTION OF THE INVENTION

[0015] An injection device 10 is provided which is particularly adapted for the self-administration of medicines

and other materials. The device is similar in structure and operation to that described in U.S. Patent No. 5,478,316.

[0016] Referring to Figs. 1 and 2, the device includes a drive assembly including an elongate housing 12 which may be easily handled by a user. One end of the housing is closed, while the opposite end is mounted to a collar 14. The collar is permanently mounted to the housing 12, and may be considered a part of the housing. A cap 16 is mounted to one end of a sleeve 28 in adjoining relation to the collar. The cap is not rotatable upon the sleeve, and is employed in conjunction with the collar for mounting a syringe assembly to the drive assembly. A plurality of elongate ribs 18 on the exterior surface of the cap are used during the mounting procedure, which is described in detail below.

[0017] Referring to Figs. 2-4, a syringe assembly 20 is provided in accordance with the preferred embodiment of the invention. A plug 24 is mounted to one end of the syringe assembly, and a needle assembly 26 is mounted to the opposite end thereof. The sleeve 28 encloses the syringe assembly. The syringe assembly includes a cartridge 30 or barrel and a piston 32 slidably positioned within the cartridge. The cap 16 is removably mounted to one end of the sleeve. An annular slot 34 is defined by a pair of concentric walls of the cap. The end portion of the sleeve 28 is positioned within the annular slot.

[0018] A rubber shield 36 is positioned within the cap, and protects the needle 38 of the syringe assembly. The shield is frictionally retained by the cap, and is removable with the cap when the device is to be employed. Rotation of the cap causes rotation of the syringe assembly 20 and sleeve 28 with respect to the drive assembly when a new syringe and sleeve assembly is secured thereto.

[0019] A coil spring 40 is provided for resiliently urging the sleeve 28 with respect to the cartridge 30. The cartridge includes a flange 42 which abuts against one end of the spring. The other end of the spring engages a radially inwardly extending wall of the sleeve. A portion 44 of the sleeve extends behind the plug 24, thereby preventing the sleeve and plug from being disconnected from the syringe assembly. The spring 40 causes the sleeve to extend over the needle in its rest position, as shown in Fig. 3.

[0020] The drive assembly of the device is designed for repeated use. The drive assembly housing 12 is comprised of two sections 12A, 12B secured to each other by ultra-sonic welding or other suitable procedure. An elongate drive rod 46 is positioned within the housing. Guide rails integral with the housing 12 maintain the orientation of the rod. The rod 46 includes an integral saddle 48 at one end thereof. The opposite end of the rod is smaller in dimension such that it fits within the plug 24 and cartridge 30. A ramp 50 is defined on one side of the rod near the saddle end thereof. The opposite side of the rod includes a plurality of notches 52. An elongate

groove 54 extends from the end of the rod within the cartridge for a distance corresponding to at least the maximum length of travel of the piston 32 within the cartridge 30.

[0021] A constant force spring 56 is provided for urging the rod 46 in the direction of the piston 32. The wound end of the spring 56 is cradled within the saddle 48. The other end of the spring is secured to the housing 12. While a coil spring could be used to propel the rod, such a spring does not exert a substantially constant force upon the rod as it moves axially through the housing. In order to insure that a coil spring exerts sufficient force at the end of the stroke of the rod, it must be compressed more than is actually required at the beginning of the stroke. This results in a relatively high impact upon the syringe assembly by the driving mechanism, and ultimately upon the epidermis of the patient. Such a driving mechanism is also more likely to be very audible to the user, which may tend to upset the user.

[0022] The force exerted by the constant force spring 56 is sufficient to overcome the friction between the piston 32 and the cartridge 30 and between the needle 38 and the user's skin. When the rod 46 is pushed back to the start position after firing, the user needs to exert only a constant force upon the rod. If a coil spring was employed in the drive assembly, a steadily increasing force would be required to reload the device.

[0023] A driver 58 is releasably coupled to the rod 46. The driver includes a generally cylindrical body through which the rod 46 extends. A radially inwardly extending pawl 60 is positionable within one of the notches 52 for connecting the driver to the rod. The pawl 60 extends from a deflectable spring arm 62 of the driver. One end of the arm includes a radially outwardly extending projection 64. One end of the driver abuts against the plug 24. Driver 58 also includes a pair of axially-aligned flats 74.

[0024] A push-button 66 is provided for engaging both the driver 58 and the sleeve 28. The push-button accordingly functions as retaining means for retaining the rod/driver assembly and the constant force spring in the storage position, as well as an actuating member for releasing the retaining means. Referring to Fig. 3, the push-button includes a first engagement member 66A which releasably engages the driver. (Alternatively, the rod could be releasably engaged). It further includes a second engagement member 66B which engages a projection 28A of the sleeve. The second engagement member prevents the sleeve from being removed from the drive assembly when the sleeve is rotated to the firing position, and also prevents the push-button from being inadvertently actuated.

[0025] The push-button further includes a projection 66C which is extendible through an opening in the housing 12. The push-button and projection are maintained in the position shown in Fig. 1 by a coil spring 68 as shown in Fig. 4 which urges the push-button towards the opening, as well as by the sleeve projection 28A.

When the sleeve projection is displaced rearwardly, as shown in Fig. 5, the coil spring 68 alone maintains the position of the push-button.

[0026] The first engagement member 66A of the push-button may be moved out of engagement with the driver 58 upon manually urging the push-button against the force of the compression spring 68. Upon further travel of the driver/rod assembly, the ramp 50 defined on one side of the rod 46 engages the first engagement member 66A, thereby drawing the push-button further inside the housing 12. This movement causes the release of the sleeve 28, which is urged by the sleeve spring 40 into a position covering the tip of the needle 38.

[0027] As discussed above, the plug 24 is mounted to one end of the syringe assembly 20, and an end of the driver 58 engages the plug. The plug includes an opening 24A (Fig. 2) through which the rod 46 passes when an injection is made. The plug further includes an abutment in the form of a radially inwardly extending projection 24B, as shown in Figs. 2-4. The syringe assembly is rotatable between a first position, where the projection 24B abuts an end surface 46A of the rod, and a second position where the projection 24B is opposite the groove 54 in the rod. The rod is accordingly able to pass through the plug when the syringe assembly is in the second rotational (i.e., firing) position. About forty degrees of rotation are required to move the syringe assembly between the first and second positions.

[0028] The plug 24 further includes a radially outwardly extending projection 24C which is located within a first axial slot 28D in the sleeve. An axial projection 24D extends from the plug, and may be used for alignment purposes when a new syringe assembly is loaded. The axial projection 24D is positioned within a second axial slot 28E formed in the sleeve. The engagement of these projections 24C, 24D with the rear walls of the respective slots 28D, 28E prevent the syringe assembly from being moved out of the sleeve under the force of the coil spring 40. Three equidistantly spaced notches 24E are formed in the outer surface of the plug. The sleeve includes three axially extending ribs 28F projecting from the inner surface thereof, as shown in Fig. 11. These ribs 28F extend within the notches 24E, thereby maintaining the desired orientation of the plug with respect to the sleeve.

[0029] The housing 12 includes means for engaging the projection 64 of the driver, thereby causing the arm 62 thereof to pivot about an integral hinge portion. This, in turn, causes the pawl 60 to be withdrawn from the notch 52. The engaging means include a radially inwardly extending projection 70 having an arcuate surface which engages a corresponding arcuate surface on the projection 64. Driver 58 further includes a squared surface 72 adjacent projection 64. Squared surface 72 engages a distally-facing portion of projection 70 to prevent inadvertent return of needle 38.

[0030] Figs. 7-9 provided detailed views of the cap 16 which is mounted to the open end of the sleeve 28. The cap includes a generally cylindrical outer wall 80 having

four radially projecting ribs 18. The cap further includes a generally cylindrical inner wall 82 which is coaxial with the outer wall 80. The inner wall 82 includes a pair of opposing slots 84 at the bottom end thereof. Each of the opposing wall portions adjoining the slots includes a radially inwardly extending rim 86. A radially inwardly extending projection 88 is formed at the top of each slot 84. The rubber shield 36 for the needle 38, shown in Fig. 2, includes a relatively thick wall 36A at its open end which is maintained between the rim 86 and projections 88.

[0031] Two pairs of opposing, radially inwardly extending projections 90 are integral with the lower end of the outer wall 80 of the cap. As discussed below, these projections function as locking members which are engageable with a locking member on the sleeve 28. Each projection 90 includes a beveled lower surface and a top surface which extends substantially perpendicularly with respect to the longitudinal axis. The beveled surface initially engages a locking member on the cap, allowing the locking member to snap behind the projection when axial force is exerted on the cap.

[0032] Two pairs of opposing grooves 92 are formed in the inner surface of the outer wall 80 of the cap. Each groove has a generally saw-toothed configuration in cross section. The grooves adjoin the end surface of the outer wall, as shown in Fig. 8, and are aligned with the respective ribs 18.

[0033] Figs. 10-13 provide detailed views of the sleeve 28 of the injection device. The sleeve includes a generally cylindrical body having a longitudinal rib 28C extending from its lower surface. A notch 28B including a pair of vertical edges is defined near the front portion of the rib 28C. A relatively short rib 28G extends from the outer surface of the front portion of the sleeve, and is designed to fit within any of the grooves 92 in the inner surface of the cap 16.

[0034] The front portion of the sleeve further includes an elongate, deflectable finger 94, which is preferably integral with the sleeve body as shown. The finger includes a first, relatively small projection or rib 96 and a second, relatively large saw-toothed projection 98. The end of the finger near the front end of the sleeve is integral with the sleeve body. The opposite end is free. The finger is positioned within an elongate slot 28H, and is deflectable about its connection to the sleeve body into the slot. Other than the two projections 96, 98, the finger is generally flush with the outer surface of the front portion of the sleeve.

[0035] The first, relatively small projection 96 of the finger 94 functions as a locking member when engaged with one of the radially extending projections 90 within the cap 16. The short rib 28G and grooves 92 ensure that the locking members 96, 90 are aligned when the cap is mounted to the sleeve. Once the projection 96 has snapped behind one of the cap projections 90, the cap cannot be removed until the finger 94 is deflected well into the slot 28H. This can be accomplished man-

ually by pushing the large projection 98 towards the slot 28H. It is preferably accomplished, however, by mounting the sleeve to the drive assembly and moving it into the firing position, as schematically shown in Fig. 14.

[0036] Figs. 15-18 provide detailed views of the collar 14, which is designed for interacting with the sleeve in an advantageous manner. The collar includes a base which is snapped onto the drive assembly housing 12. A generally cylindrical portion is integral with the base.

[0037] A first finger 14C including a pawl extends from the collar base to the rim. An axial slot 14B is provided within the inner surface of the cylindrical portion of the collar. The slot 14B is located about forty degrees from the finger 14C. A projection 14D extends downwardly from the cylindrical portion, and is located between the slot 14B and finger 14C. When the collar is mounted to the housing 12, the projection 14D is positioned in opposing relation to an axial rib 12D extending from the inner surface thereof. A channel is defined between the projection 14D and rib 12D for receiving the longitudinal rib 28C of the sleeve 28. The channel is aligned with the slot 14B in the collar. The projection 14D includes an inclined surface 14E which allows a portion of the sleeve rib 28C to be rotated from the slot 14B into a second slot having a bottom wall defined by the finger 14C. Inclined surface 14E prevents sleeve 28 from deviating from its rotational position once it has been rotated in place by a user.

[0038] A second finger 14F including a second pawl 14G is positioned in alignment with the slot 14B. The second finger is deflectable about its connecting point to the cylindrical portion of the collar, and is substantially parallel to the first finger 14C. The second pawl 14G is oriented such that the second finger is deflected by the longitudinal rib 28C of the sleeve as the sleeve is mounted to the drive assembly. The second pawl enters the notch 28B within the rib when the sleeve has been fully inserted. The sleeve is accordingly prevented from being withdrawn from the drive assembly housing once the second pawl has entered the sleeve notch.

[0039] Fig. 19 illustrates an alternative embodiment of the invention where the sleeve rib 28C defines a plurality of incremental stops in the form of saw-toothed ratchet teeth 100. As the sleeve enters the collar, each of the stops engages the second pawl 14G, preventing sleeve withdrawal until the sleeve is rotated to the firing position. The walls defining the slot 14B and the sleeve rib are designed to permit sleeve rotation only upon full sleeve insertion. Rotation is then only possible in the direction of the inclined surface 14E and the first finger 14C.

[0040] The portion of the collar opposite the finger 14F is designed to interact with the deflectable finger 94 of the sleeve 28. It includes a notch bounded on one side by a shoulder 102 and on the opposite side by a ramp 104. When the sleeve is inserted into the collar and drive assembly housing, the finger 94, which is located one hundred eighty degrees from the rib 28C of the sleeve,

enters the notch. Rotation of the sleeve into the firing position causes the ramp to bear against the relatively large projection 98 of the sleeve finger 94, thereby deflecting it radially inwardly. This causes the disengagement of the relatively small projection 96 and one of the radially inward projections 90 of the cap 16. The cap may accordingly be removed from the sleeve upon such disengagement by pulling it axially.

[0041] The injection device 10, when ready for use, includes a cartridge 30 containing the material to be injected. The piston 32 is located towards the rear end of the cartridge. The radially inwardly extending projection 24B of the plug 24 is located opposite the groove 54 in the rod 46. The driver 58 is coupled to the drive rod 46. The push-button 66 engages the driver 58, thereby preventing movement of the rod/driver assembly under the force of the constant force spring 56. The push-button cannot be depressed to release the rod/driver assembly as the sleeve projection 28A abuts the second engagement member 66B of the push-button.

[0042] The cap 16 is removed by pulling it forwardly along the longitudinal axis of the device. The shield 36 is removed with the cap. The device otherwise remains unchanged from its original position.

[0043] The end of the sleeve 28 is pressed against the epidermis, thereby causing a force to be exerted thereon. The sleeve moves rearwardly against the force of the sleeve spring 40 for several millimeters, at which time the rear portion 44 of the sleeve engages a stop 12C extending from the housing 12. This movement is sufficient to displace the sleeve projection 28A a sufficient distance that it no longer interferes with the downward movement of the push-button 66.

[0044] The projection 66C of the push-button is then pressed manually towards the housing, compressing spring 68 in the process. This causes displacement of the first engagement member 66A such that it no longer engages the driver 58. The driver 58 and rod 46 move as a unit under the constant force of the spring 56, causing the syringe assembly 20 (via the plug 24) to move forwardly, and the needle 38 thereof to penetrate the skin. The compression of spring 68 results in projection 66C being disposed against flats 74 of driver 58. The result is that, during the injection phase, projection 28A of the sleeve rests against engagement face 66D of second engagement member 66B so as to avoid premature withdrawal of sleeve 28 from the epidermis that might be caused, for instance, by any "kickback" forces exerted by constant force spring 56.

[0045] As the rod remains coupled to the driver, the piston 32 does not move. Once the needle has sufficiently penetrated the skin and underlying tissue, the projection 64 on the driver 58 engages the projection 70 extending inwardly from the housing 12. This causes the pivotable arm 62 of the driver to rotate, and the pawl 60 to move out of the notch 52. The driver 58 and rod are decoupled at this point, which is just prior to the bottoming of the sleeve spring 40.

[0046] The rod 46 is urged forwardly as the rear end of the constant force spring 56 rotates within the saddle 48. The rod now moves with respect to the driver 58, urging the piston 32 forwardly as fluid is displaced from the cartridge 30. The rod advances through the plug 24 as the groove 54 is aligned with the plug projection 24B. Movement of the rod continues until the piston 32 engages the end wall of the cartridge 30. The ramp 50 of the rod 46 engages the first engagement member 66A of the push-button near the end of its stroke, drawing the push-button entirely within the housing. This provides a visual end of dose indication. The sleeve 28 is released once the second engagement member 66B is sufficiently displaced with respect to the sleeve projection 28A.

[0047] Upon completion of the injection procedure, the device 10 is withdrawn from the body. The sleeve 28 moves forwardly under the force of the sleeve spring to again cover the needle 38, and is releasably locked in position by the pawl 14A on the first collar finger 14C. The push-button remains within the housing, and accordingly cannot be actuated until a new syringe assembly is installed.

[0048] The disposable portion of the device is disconnected from the reusable portion by grasping the sleeve 28 and pulling it in the axial direction. This causes the displacement of the pawl 14A from the notch 28B within the rib 28C of the sleeve. The cap 16 can be replaced before or after removal of the disposable portion of the device.

[0049] A new syringe assembly is installed by grasping the cap 16 and aligning the longitudinal rib 28C on the sleeve with the slot 14B in the collar. It can then be pushed into the housing until the cap 16 engages the collar 14. When aligned in this manner, the plug projection 24B is in opposing relation to the end surface 46A of the rod rather than the groove 54 within the rod. Insertion of the disposable portion of the device 10 accordingly causes the rod 46 to be pushed back into the housing 12. The wound end of the constant force spring 56 rotates in the saddle as the rod is pushed. The rim of the plug 24 pushes back the driver 58 during this procedure. The pawl 14G of the second finger 14F of the collar moves within the notch 28B in the rib 28C, preventing removal of the disposable portion of the device once fully inserted.

[0050] The disposable portion can be rotated about an arc of forty degrees once it is pushed as far back as possible. Because the driver is pushed back with the rod, the push-button 66 springs back into the actuable position as it moves partially within the gap of the driver. The driver pawl 60 moves into one of the notches 52 in the rod. The particular notch to be engaged by the pawl is determined by the length of the plug 24. If the piston 32 is located closer to the needle end of the cartridge, the nose portion of the plug will be longer such that it adjoins, but does not contact, the piston. As discussed above, rotation of the sleeve with respect to the collar

also causes the inward displacement of the sleeve finger 94 as the projection engages the ramp 104, thereby allowing the cap to be removed from the sleeve. The pawl 14G is simultaneously rotated out of engagement with the notch 28B in the sleeve rib, which allows the sleeve to be removed once the device has been fired.

[0051] It will be appreciated that various modifications can be made to the device for various purposes. The sleeve, for example, may include an engagement member and the housing a stop member, rather than vice versa, for preventing premature removal of the disposable portion of the device. While not preferred, a pair of springs could be used to drive the syringe assembly and piston, respectively. One or both springs could be constant force springs, preferably both. While it is also highly preferred that the drive assembly be rearmed upon insertion of the syringe assembly, this step could also be accomplished as a separate procedure. The use of a constant force spring facilitates the rearming procedure regardless of which approach is employed. Rearming may also be accomplished without directly engaging the drive rod. It is sufficient that the rod be driven back against the force of the drive spring, whether by direct engagement of the rod or via an intermediate structure.

[0052] Although illustrative embodiments of the present invention have been described herein with reference to the accompanying drawings, it is to be understood that the invention is not limited to those precise embodiments, and that various other changes and modifications may be effected therein by one skilled in the art without departing from the scope of the invention as defined in the appended claims.

Claims

1. An assembly for providing automatic injections, comprising:

a drive assembly including a housing (12) and a drive rod (46) slidably mounted within said housing;

a sleeve (28) positionable within said housing; a syringe assembly slidably mounted within said sleeve, said syringe assembly including a cartridge (30) and a piston (32) slidably mounted within said cartridge, said drive rod (46) being operatively associated with said syringe assembly when said sleeve is positioned within said housing;

a spring (56) for urging said drive rod towards said syringe assembly; **characterised in that** one of said sleeve (28) and said housing (12) including a stop member and the other of said sleeve and said housing including an engagement member engageable with said stop member, said stop member and engagement member being arranged such that said engage-

ment member engages said stop member when said sleeve (28) is inserted along a longitudinal axis into said housing (12) thereby preventing withdrawal of said sleeve from said housing along said longitudinal axis, said engagement member being disengageable from said stop member upon rotation of said sleeve about said longitudinal axis.

2. An assembly as described in claim 1 wherein said engagement member comprises a pawl (60) extending from said housing (12) and stop member includes an abutment formed in an outer surface of said sleeve.
3. An assembly as described in claim 2 wherein said sleeve (28) includes an elongate rib projecting radially outwardly therefrom, said stop member being formed on said elongate rib.
4. An assembly as described in claim 2 wherein said housing (12) includes a second engagement member, said second engagement member being rotationally displaced from said pawl (60), said pawl being engageable with said stop member when said sleeve (28) is in a first rotational position, said second engagement member being engageable with said stop member when said sleeve is in a second rotational position.
5. An assembly as described in claim 4 wherein said pawl (60) is axially displaced with respect to said second engagement member.
6. An assembly as described in claim 1 wherein said housing (12) includes a first end, a second end, and a collar (14) mounted to said first end, said engagement member being integral with said collar.
7. An assembly as described in claim 6 wherein said collar (14) includes an axial slot (14B), said engagement member being aligned with said axial slot.
8. An assembly as described in claim 7 wherein said sleeve (28) includes an elongate, radially outwardly extending rib (28C), said rib defining said stop member, said rib being positionable within said axial slot (14B).
9. An assembly as described in claim 1 wherein said housing (12) includes an axial slot, said sleeve includes an elongate rib defining said stop member, and said engagement member is mounted to said housing (12) in alignment with said axial slot.
10. An assembly as described in claim 1 wherein said housing (12) includes an elongate body having a first end and a second end and a collar (14) mount-

ed to said first end of said body, said collar including a deflectable finger (14C), said engagement member extending from said deflectable finger.

11. An assembly as described in claim 10 wherein said collar (14) includes first (14C) and second (14F) deflectable fingers, a pawl extending from each of said fingers, said pawl (14G) extending from second finger (14F) comprising said engagement member, said stop member being formed on an external surface of said sleeve, said stop member being engageable with said pawl (14G) extending from said second finger (14F) when said sleeve (28) is in a first rotational position, said stop member being engageable with said pawl extending from said first finger when said sleeve is in a second rotational position. 5 10 15
12. An assembly as described in claim 11 wherein said first (14C) and second (14F) fingers are substantially parallel, said first finger having a free end adjoining a first end of said collar, said second finger having a free end adjoining a second end of said collar (14) opposite from said first end. 20 25
13. An assembly as described in claim 1 wherein said sleeve (28) includes an elongate rib defining a plurality of incremental stop members, said engagement member comprising a projection extending from an inner surface of said housing (12). 30
14. An assembly as described in claim 1 including a plug (24) mounted to said cartridge (30), said drive rod (46) being engageable with said plug when said sleeve (28) is in a first rotational position, said drive rod being engageable with said piston (32) when said sleeve (28) is in a second rotational position, and wherein said stop member is engageable with said engagement member when said sleeve (28) is in said first rotational position, said stop member being disengageable from said engagement member when said sleeve is rotated from said first rotational position to said second rotational position. 35 40 45

Patentansprüche

1. Zusammenstellung zum Schaffen von automatischen Injektionen, umfassend: 50
 - eine Antriebsvorrichtung beinhaltend ein Gehäuse (12) und eine in diesem Gehäuse gleitbar angebrachte Antriebsstange (46);
 - eine in diesem Gehäuse positionierbare Hülse (28);
 - eine in dieser Hülse gleitbar angebrachte Spritzenvorrichtung, wobei die Spritzenvorrichtung eine Kartusche (30) und einen in dieser Kartu-

sche gleitbar angebrachten Kolben (32) umfaßt, und die Antriebsstange (46) bei Positionierung der Hülse im Gehäuse mit der Spritzenvorrichtung funktionsfähig verbunden ist; eine Feder (56) zum Treiben der Antriebsstange zur Spritzenvorrichtung; **gekennzeichnet dadurch, daß** entweder die Hülse (28) oder das Gehäuse (12) einen Anschlagteil und der andere Teil der Hülse bzw. des Gehäuses einen mit dem Anschlagteil in Eingriff bringbaren Eingriffsteil umfassen, wobei der Anschlagteil und der Eingriffsteil derart angeordnet sind, dass der Eingriffsteil in den Anschlagteil eingreift, wenn die Hülse (28) entlang einer Längsachse in das Gehäuse (12) eingeführt wird, wodurch das Zurückziehen der Hülse aus dem Gehäuse entlang der Längsachse verhindert wird, wobei der Eingriffsteil bei Drehung der Hülse um die Längsachse vom Anschlagteil außer Eingriff bringbar ist.

2. Zusammenstellung wie in Anspruch 1 beschrieben, wobei der Eingriffsteil eine sich aus dem Gehäuse (12) erstreckende Klinke (60) umfaßt und der Anschlagteil ein in einer Außenfläche der Hülse gebildetes Widerlager umfaßt.
3. Zusammenstellung wie in Anspruch 2 beschrieben, wobei die Hülse (28) eine radial aus ihr herausragende verlängerte Rippe umfaßt, wobei der Anschlagteil auf der verlängerten Rippe gebildet ist.
4. Zusammenstellung wie in Anspruch 2 beschrieben, wobei das Gehäuse (12) einen zweiten Eingriffsteil umfaßt, wobei der zweite Eingriffsteil von der Klinke (60) rotierend versetzt ist, wobei die Klinke mit dem Anschlagteil in Eingriff bringbar ist, wenn sich die Hülse (28) in einer ersten Drehposition befindet und wobei der zweite Eingriffsteil mit dem Anschlagteil in Eingriff bringbar ist, wenn sich die Hülse in einer zweiten Drehposition befindet.
5. Zusammenstellung wie in Anspruch 4 beschrieben, wobei die Klinke (60) in Bezug auf den zweiten Eingriffsteil axial versetzt ist.
6. Zusammenstellung wie in Anspruch 1 beschrieben, wobei das Gehäuse (12) einen ersten Endteil, einen zweiten Endteil und einen am ersten Endteil angebrachten Ring (14) umfaßt, wobei der Eingriffsteil mit dem Ring integral ausgebildet ist.
7. Zusammenstellung wie in Anspruch 6 beschrieben, wobei der Ring (14) einen axialen Schlitz (14B) umfaßt, und der Eingriffsteil auf den axialen Schlitz ausgerichtet ist.

8. Zusammenstellung wie in Anspruch 7 beschrieben, wobei die Hülse (28) eine sich radial nach außen erstreckende, verlängerte Rippe (28C) umfasst und die Rippe den Anschlagteil definiert, wobei die Rippe im axialen Schlitz (14B) positionierbar ist. 5
9. Zusammenstellung wie in Anspruch 1 beschrieben, wobei das Gehäuse (12) einen axialen Schlitz umfasst, die Hülse eine den Anschlagteil definierende verlängerte Rippe umfasst und der Eingriffsteil in Ausrichtung auf den axialen Schlitz am Gehäuse (12) angebracht ist. 10
10. Zusammenstellung wie in Anspruch 1 beschrieben, wobei das Gehäuse (12) einen verlängerten Körper mit einem ersten Endteil und einem zweiten Endteil und einem am ersten Endteil des Körpers angebrachten Ring (14) umfasst, wobei der Ring einen ablenkbaren Finger (14C) umfasst, wobei sich der Eingriffsteil vom abbiegbaren Finger erstreckt. 15 20
11. Zusammenstellung wie in Anspruch 10 beschrieben, wobei der Ring (14) erste (14C) und zweite (14F) abbiegbare Finger umfasst, wobei sich eine Klinke von jedem dieser Finger erstreckt, wobei sich die Klinke (14G) aus dem den Eingriffsteil umfassenden zweiten Finger (14F) erstreckt, wobei der Anschlagteil auf einer Außenfläche der Hülse gebildet ist und der Anschlagteil mit der Klinke (14G), welche sich aus dem zweiten Finger (14F) erstreckt, in Eingriff bringbar ist, wenn sich die Hülse (28) in einer ersten Drehposition befindet und der Anschlagteil mit der Klinke, welche sich aus dem ersten Finger erstreckt, in Eingriff bringbar ist, wenn sich die Hülse in einer zweiten Drehposition befindet. 25 30 35
12. Zusammenstellung wie in Anspruch 11 beschrieben, wobei die ersten (14C) und zweiten (14F) Finger im Wesentlichen parallel sind, wobei der erste Finger einen freien Endteil hat, welcher an einen ersten Endteil des Rings angrenzt und der zweite Finger einen freien Endteil hat, welcher an einen zweiten Endteil des Rings (14) gegenüber dem ersten Endteil angrenzt. 40 45
13. Zusammenstellung wie in Anspruch 1 beschrieben, wobei die Hülse (28) eine verlängerte Rippe umfasst, welche eine Mehrzahl von inkrementellen Anschlagteilen definiert, wobei der Eingriffsteil einen sich aus einer Innenfläche des Gehäuses (12) erstreckenden Vorsprung umfasst. 50
14. Zusammenstellung wie in Anspruch 1 beschrieben, umfassend einen an der Kartusche (30) angebrachten Stöpsel (24), wobei die Antriebsstange (46) mit dem Stöpsel in Eingriff bringbar ist, wenn sich die Hülse (28) in einer ersten Drehposition befindet und

die Antriebsstange mit dem Kolben (32) in Eingriff bringbar ist, wenn sich die Hülse (28) in einer zweiten Drehposition befindet, und worin der Anschlagteil mit dem Eingriffsteil in Eingriff bringbar ist, wenn sich die Hülse (28) in der ersten Drehposition befindet, wobei der Anschlagteil vom Eingriffsteil lösbar ist, wenn die Hülse von der ersten Drehposition in die zweite Drehposition gedreht wird.

Revendications

1. Ensemble pour procurer des injections automatiques, comprenant :
 - un ensemble d'entraînement comprenant un logement (12) et une tige d'entraînement (46) monté de manière coulissante à l'intérieur dudit logement ;
 - une boîte de glissement (28) positionnable à l'intérieur dudit logement ;
 - un ensemble de seringue monté avec faculté de glissement à l'intérieur de ladite boîte de glissement, ledit ensemble de seringue comportant une cartouche (30) et un piston (32) monté avec faculté de glissement à l'intérieur de ladite cartouche, ladite tige d'entraînement (46) étant associée, de manière fonctionnelle, avec ledit ensemble de seringue lorsque ladite boîte de glissement est positionnée à l'intérieur dudit logement ;
 - un ressort (56) pour pousser ladite tige d'entraînement vers ledit ensemble de seringue ;


caractérisé en ce que l'un de ladite boîte de glissement (28) et dudit logement (12) comportant un élément d'arrêt et l'autre de ladite boîte de glissement et dudit logement comportant un élément de mise en prise pouvant être mis en prise avec ledit élément d'arrêt, lesdits élément d'arrêt et élément de mise en prise étant agencés de sorte que ledit élément de mise en prise vient en prise avec ledit élément d'arrêt lorsque ladite boîte de glissement (28) est insérée suivant un axe longitudinal dans ledit logement (12) empêchant, par cet effet, l'extraction de ladite boîte de glissement dudit logement suivant ledit axe longitudinal, l'élément de mise en prise pouvant être découplé dudit élément d'arrêt lors de la rotation de ladite boîte de glissement suivant ledit axe longitudinal.


2. Ensemble selon la revendication 1, dans lequel ledit élément de mise en prise comprend un cliquet (60) s'étendant depuis ledit logement (12) et l'élément d'arrêt comprend une butée formée dans une sur-



face extérieure de ladite boîte de glissement.



3. Ensemble selon la revendication 2, dans lequel ladite boîte de glissement (28) comprend une nervure allongée faisant saillie radialement à l'extérieur de celle-ci, ledit élément d'arrêt étant formé sur ladite nervure allongée. 5
4. Ensemble selon la revendication 2, dans lequel ledit logement (12) comprend un second élément de mise en prise, le second élément de mise en prise étant déplacé de manière rotative dudit cliquet (60), ledit cliquet pouvant être mis en prise avec ledit élément d'arrêt lorsque ladite boîte de glissement (28) est dans une première position de rotation, ledit second élément de mise en prise pouvant être mis en prise avec ledit élément d'arrêt lorsque ladite boîte de glissement est dans une seconde position de rotation. 10 15
5. Ensemble selon la revendication 4, dans lequel ledit cliquet (60) est déplacé axialement par rapport audit second élément de mise en prise. 20
6. Ensemble selon la revendication 1, dans lequel ledit logement (12) comprend une première extrémité, une seconde extrémité et un collier (14) montés sur la première extrémité, ledit élément de mise en prise étant solidaire dudit collier. 25 30
7. Ensemble selon la revendication 6, dans lequel ledit collier (14) comprend une fente axiale (14B), ledit élément de mise en prise étant aligné avec ladite fente axiale. 35
8. Ensemble selon la revendication 7, dans lequel ladite boîte de glissement (28) comprend une nervure allongée (28C) s'étendant radialement vers l'extérieur, ladite nervure définissant ledit élément d'arrêt, ladite nervure pouvant être positionnée à l'intérieur de ladite fente axiale (14B). 40
9. Ensemble selon la revendication 1, dans lequel ledit logement (12) comprend une fente axiale, ladite boîte de glissement comprend une nervure allongée définissant ledit élément d'arrêt et ledit élément de mise en prise est monté sur ledit logement (12) en alignement avec ladite fente axiale. 45
10. Ensemble selon la revendication 1, dans lequel ledit logement (12) comprend un corps allongé comportant une première extrémité et une seconde extrémité et un collier (14) monté sur ladite première extrémité dudit corps, ledit collier comportant un doigt (14C) pouvant être défléchi, ledit élément de mise en prise s'étendant depuis ledit doigt pouvant être défléchi. 50 55

11. Ensemble selon la revendication 10, dans lequel ledit collier (14) comprend des premier (14C) et second (14F) doigts qui peuvent être défléchis, un cliquet s'étendant depuis chacun desdits doigts, le cliquet (14G) s'étendant depuis le second doigt (14F) comportant ledit élément de mise en prise, ledit élément d'arrêt étant formé sur une surface externe de ladite boîte de glissement, ledit élément d'arrêt pouvant être mis en prise avec ledit cliquet (14G) s'étendant depuis ledit second doigt (14F) lorsque ladite boîte de glissement (28) est dans une première position de rotation, ledit élément d'arrêt pouvant être mis en prise avec ledit cliquet s'étendant depuis ledit premier doigt lorsque ladite boîte de glissement est dans une seconde position de rotation.
12. Ensemble selon la revendication 11, dans lequel lesdits premier (14C) et second (14F) doigts sont sensiblement parallèles, ledit premier doigt comportant une extrémité libre joignant une première extrémité dudit collier, ledit second doigt comportant une extrémité libre joignant une seconde extrémité dudit collier (14) opposée à ladite première extrémité.
13. Ensemble selon la revendication 1, dans lequel ladite boîte de glissement (28) comprend une nervure allongée définissant une pluralité d'éléments d'arrêt incrémentiels, ledit élément de mise en prise comprenant une saillie s'étendant depuis une surface interne dudit logement (12).
14. Ensemble selon la revendication 1, comprenant un bouchon (24) monté sur ladite cartouche (30), ladite tige d'entraînement (46) pouvant être mise en prise avec ledit bouchon lorsque ladite boîte de glissement (28) se trouve dans une première position de rotation, ladite tige d'entraînement pouvant être mise en prise avec ledit piston (32) lorsque ladite boîte de glissement (28) se trouve dans une seconde position de rotation, et dans lequel ledit élément d'arrêt peut être mis en prise avec ledit élément de mise en prise lorsque ladite boîte de glissement (28) se trouve dans ladite première position de rotation, ledit élément d'arrêt pouvant être découplé dudit élément de mise en prise lorsque ladite boîte de glissement est tournée depuis ladite première position de rotation vers ladite seconde position de rotation.

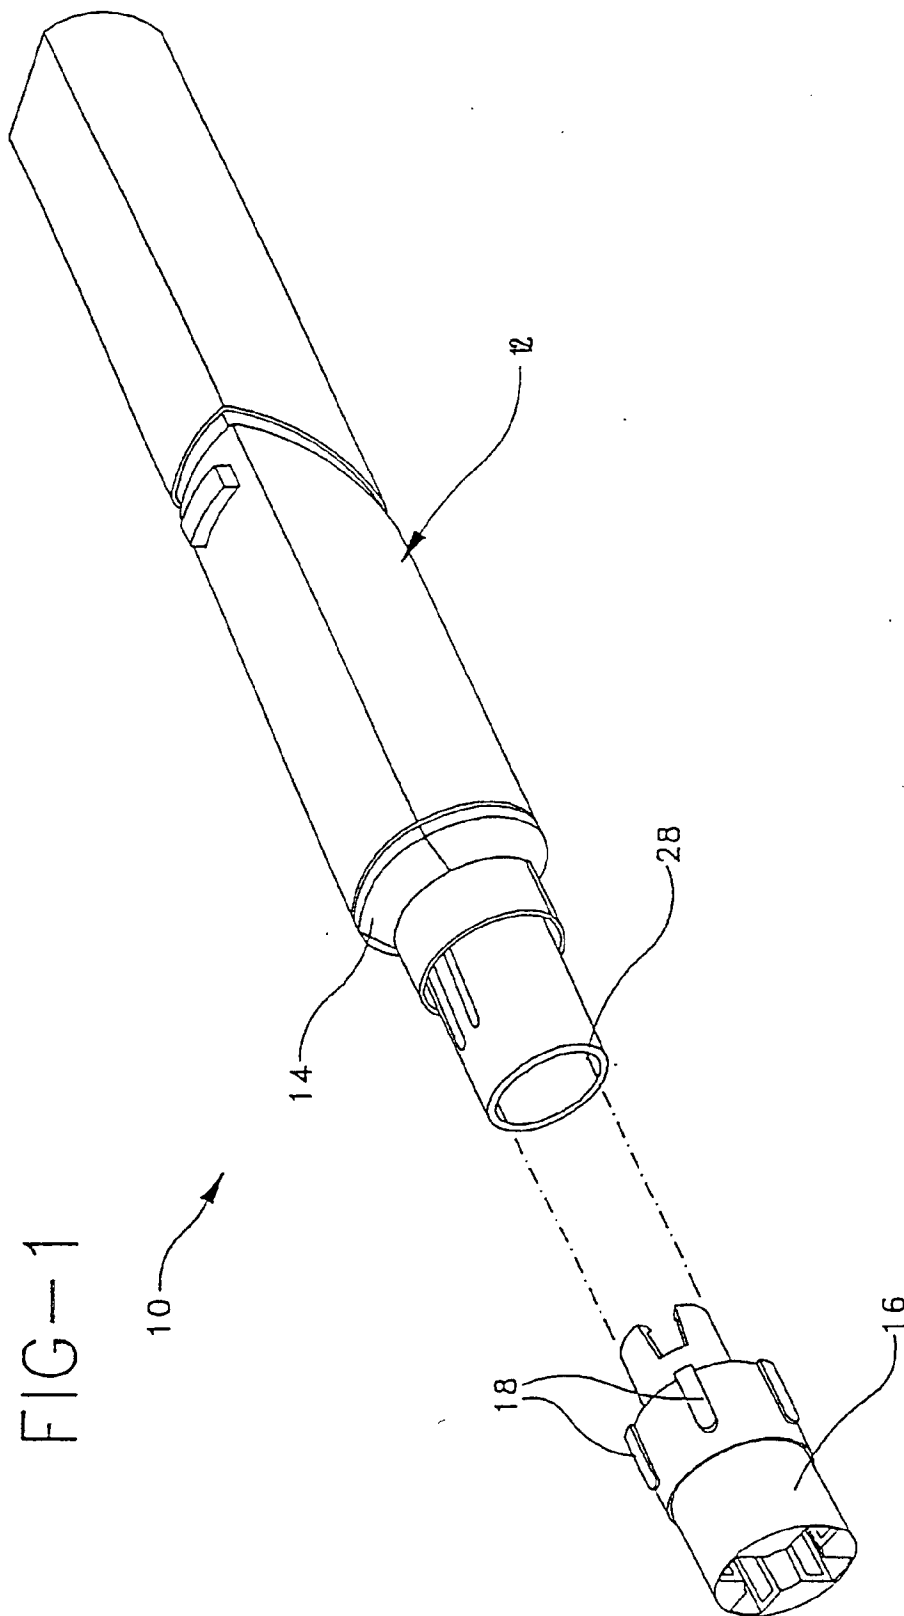

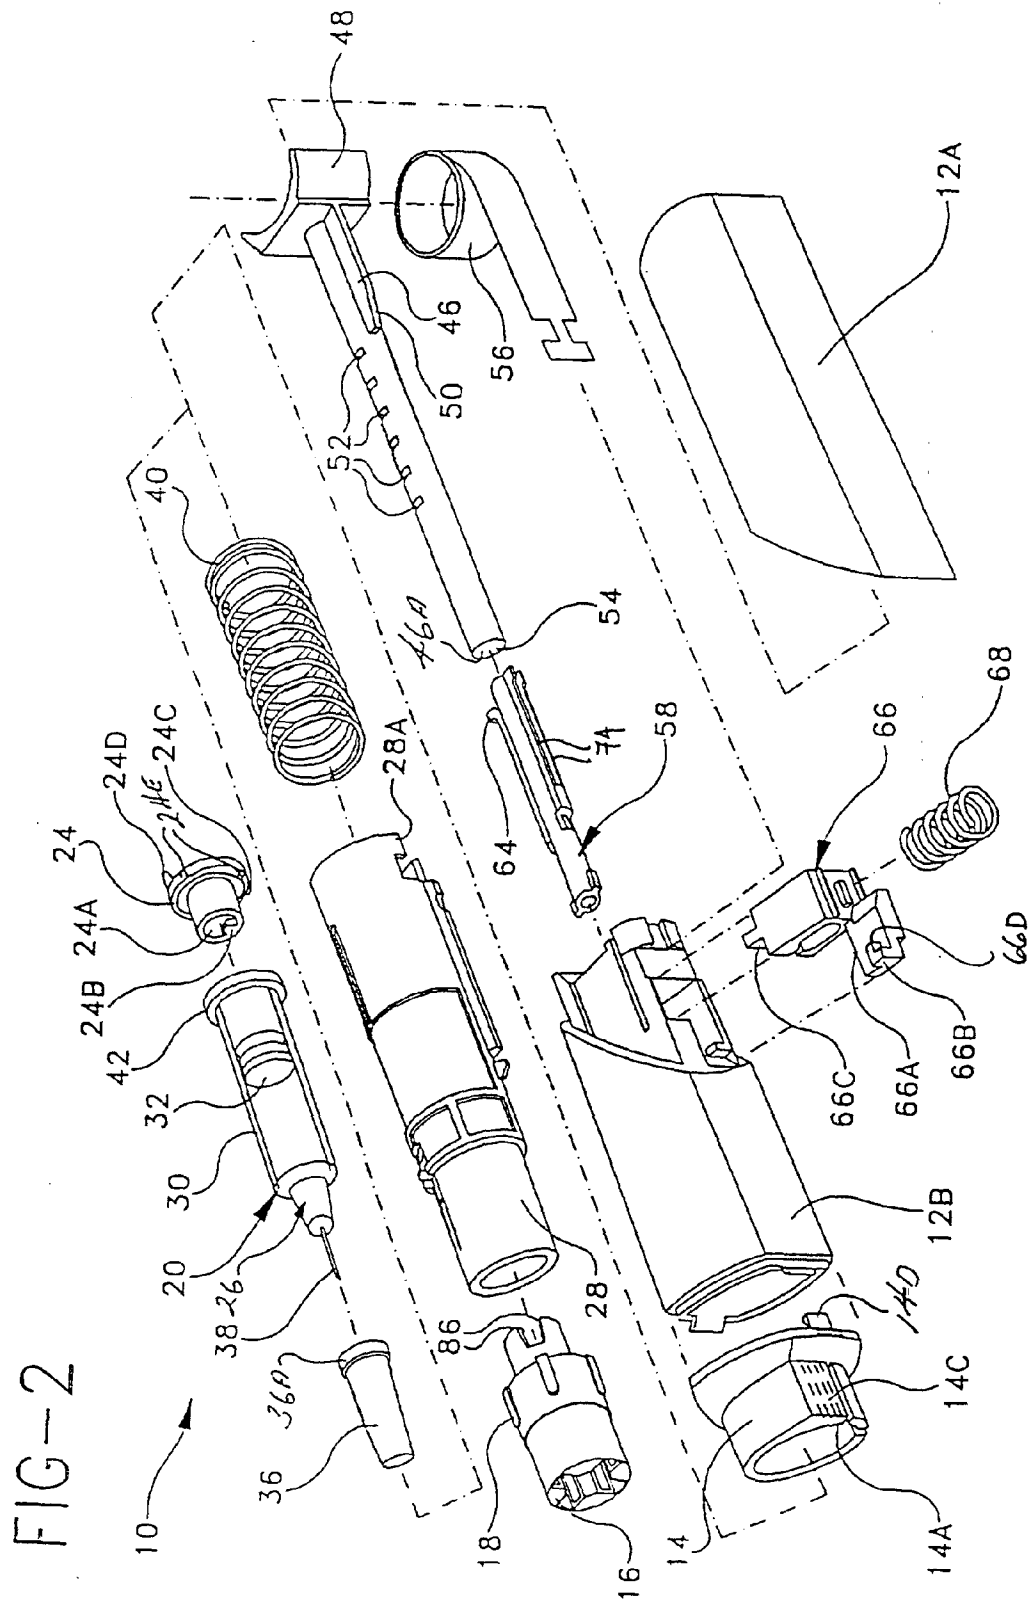

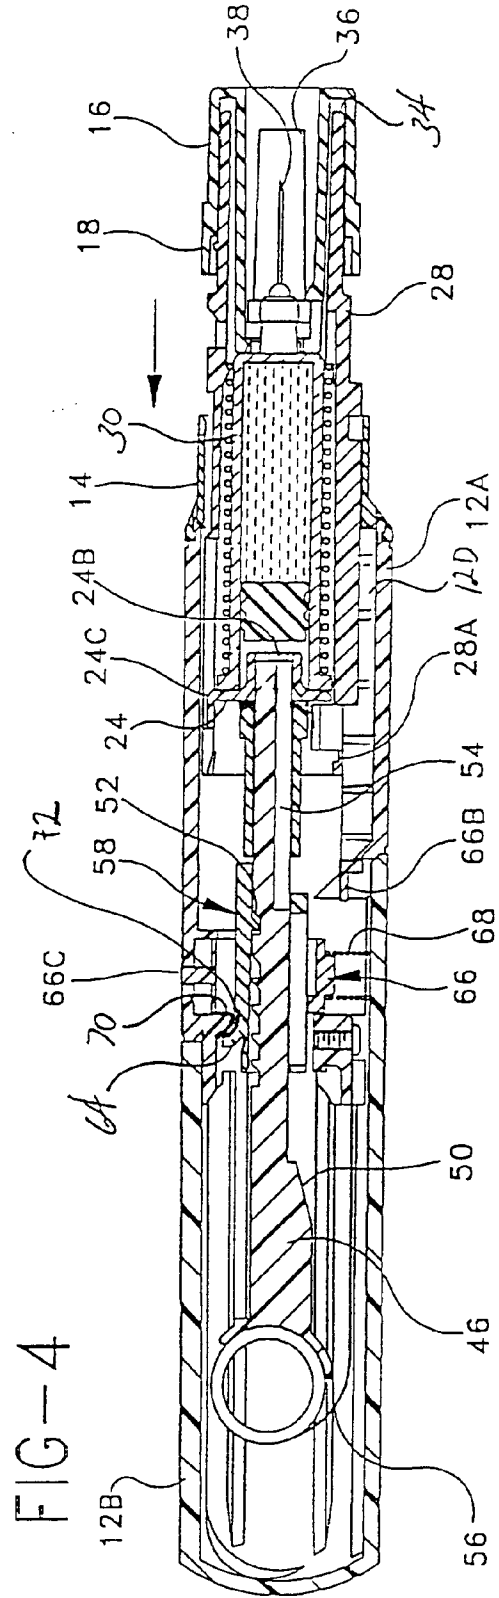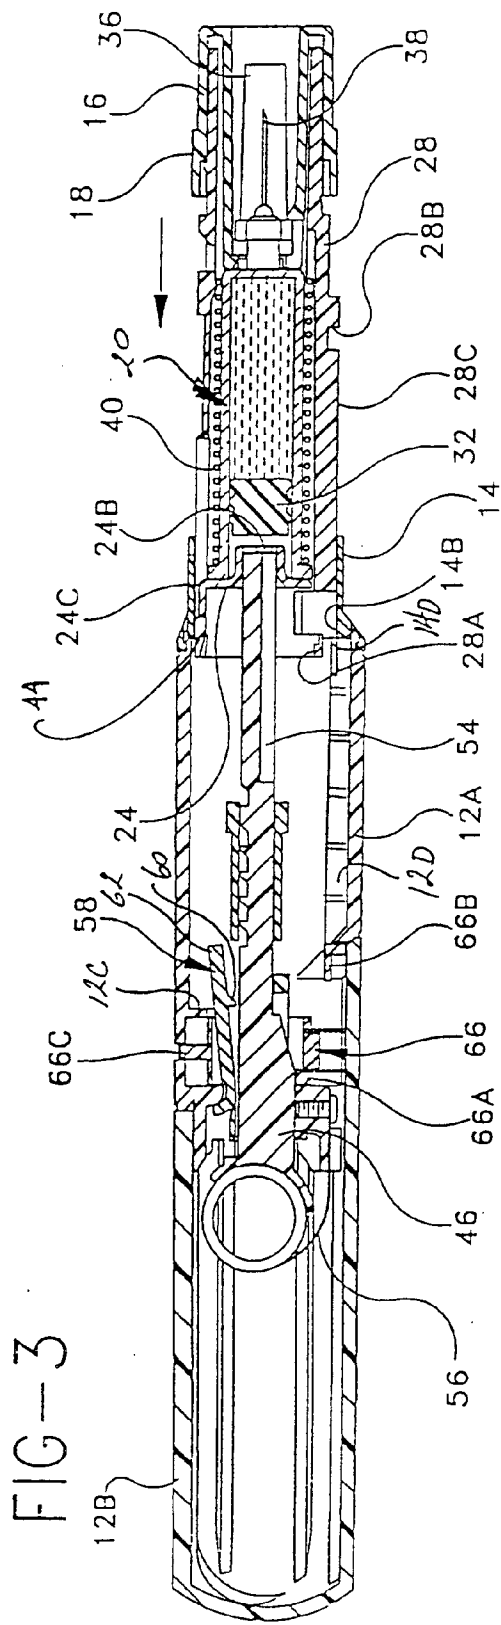

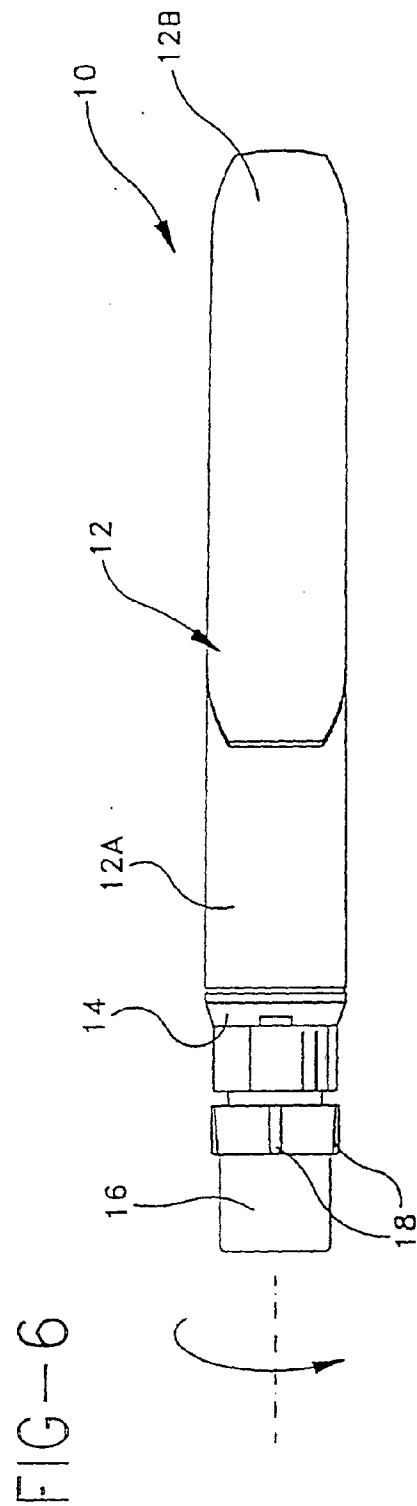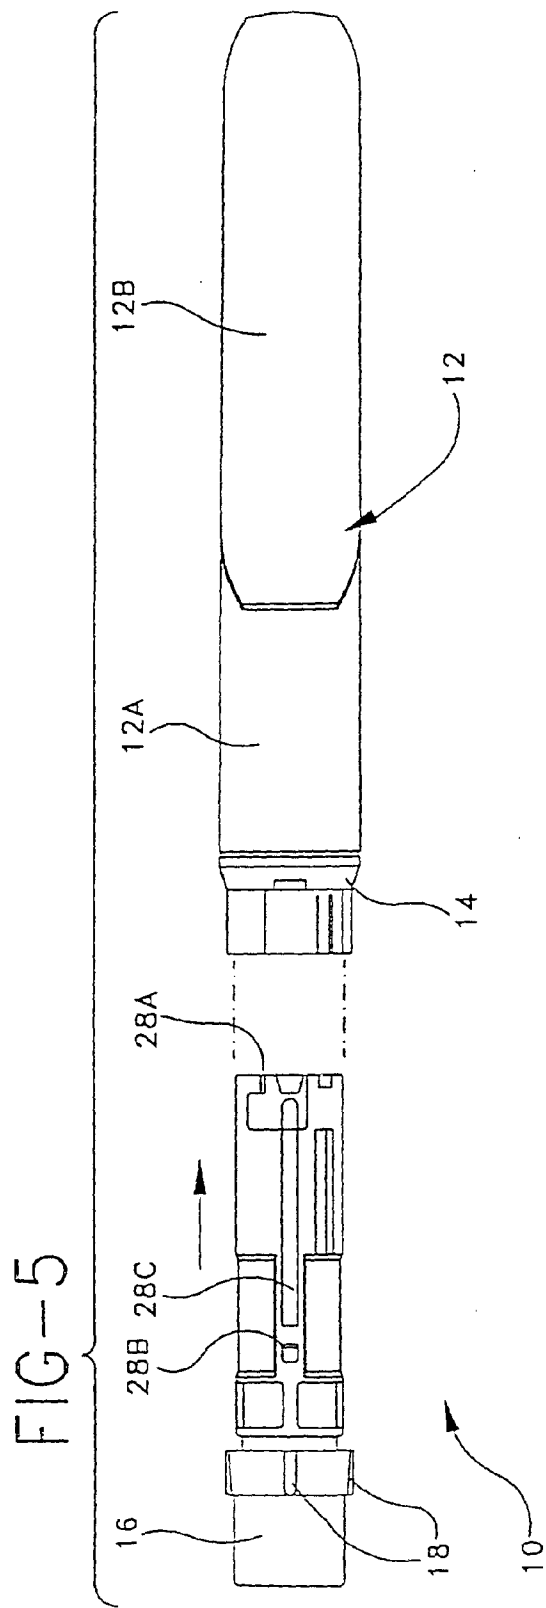

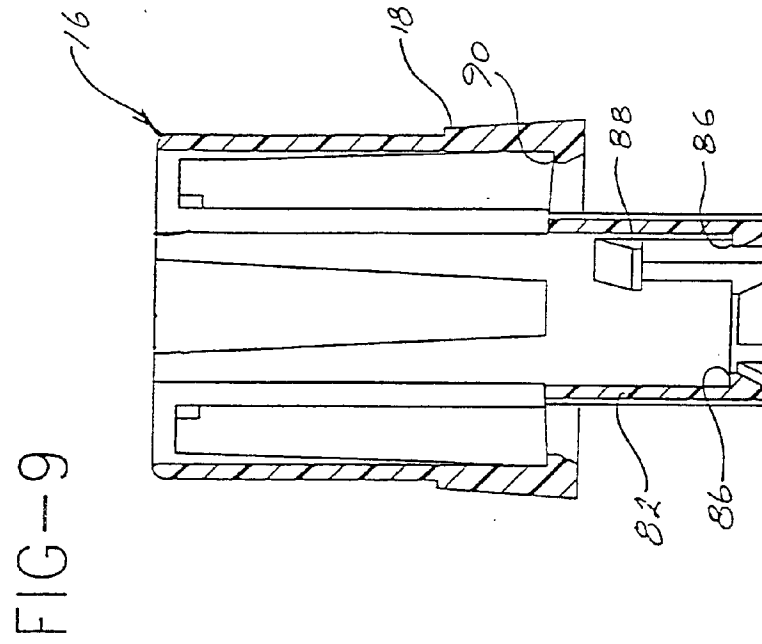
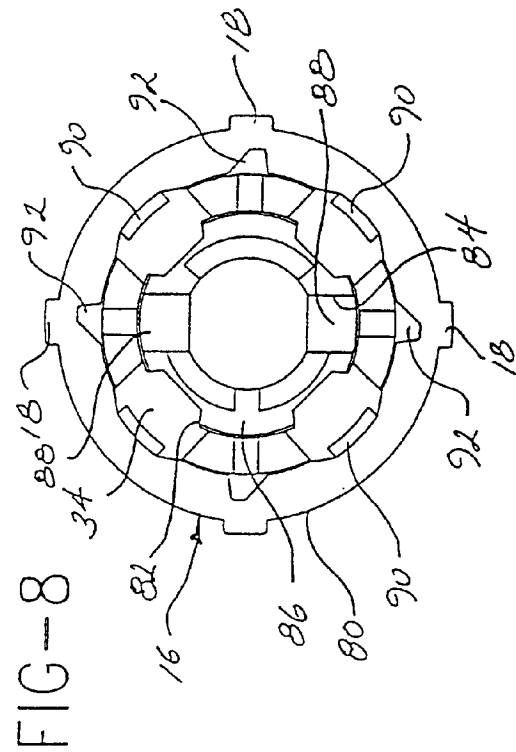
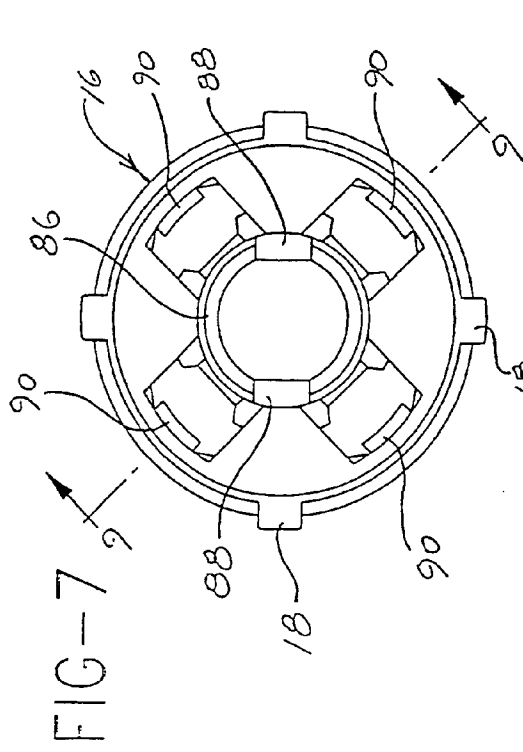


FIG-10

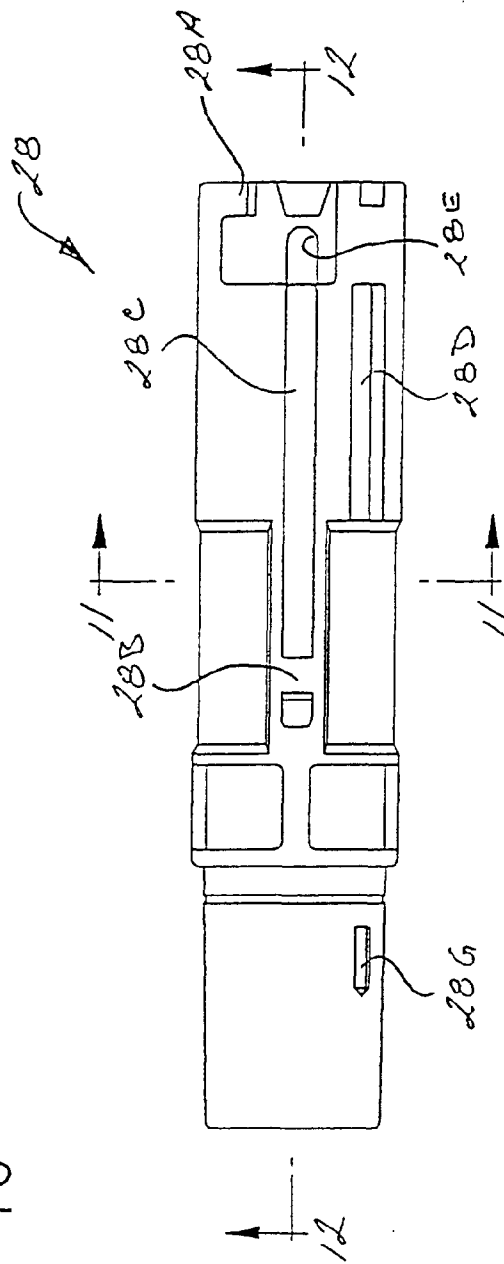
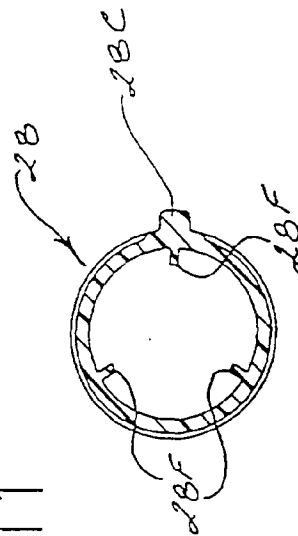


FIG-11



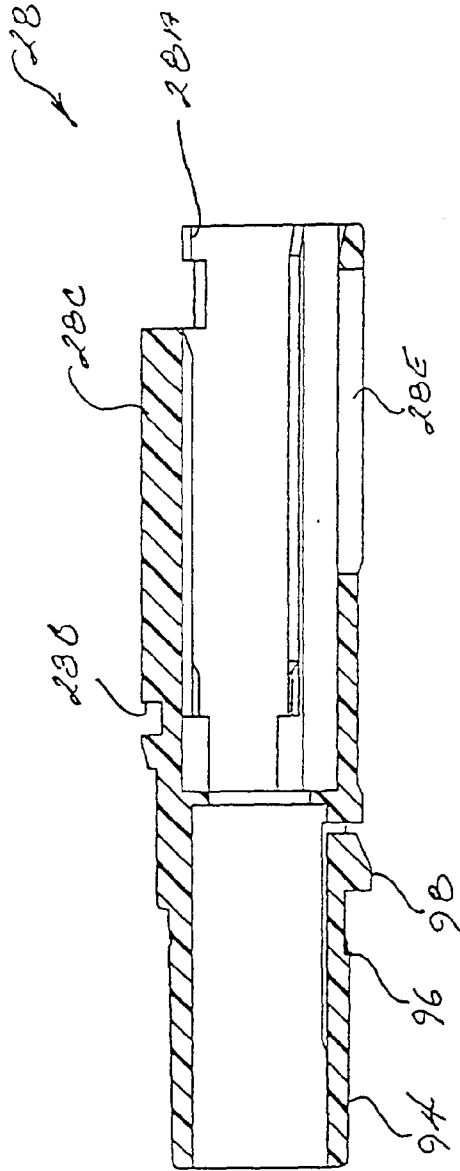


FIG-12

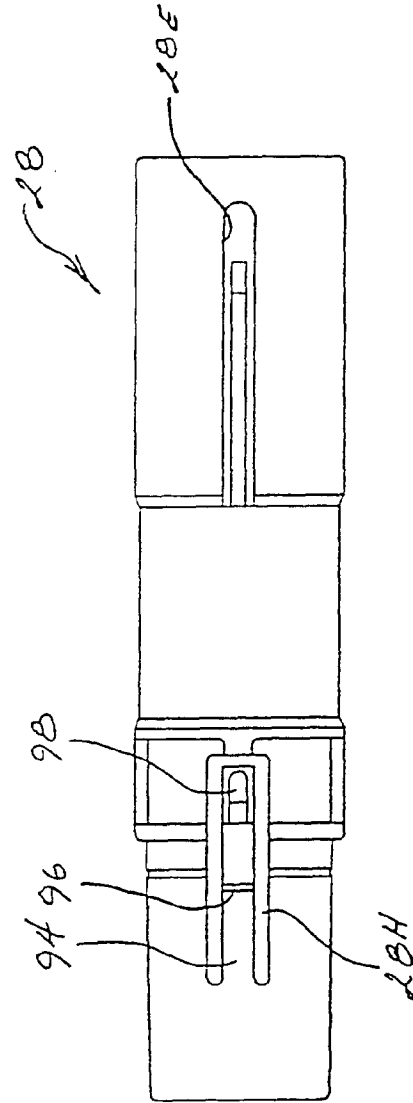


FIG-13

FIG-14.

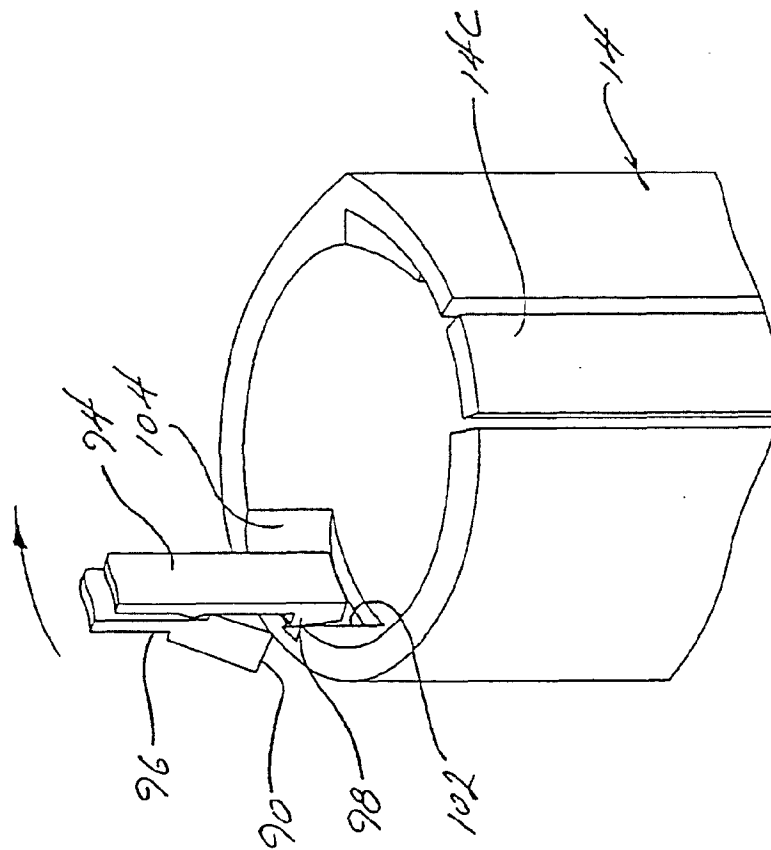


FIG-16

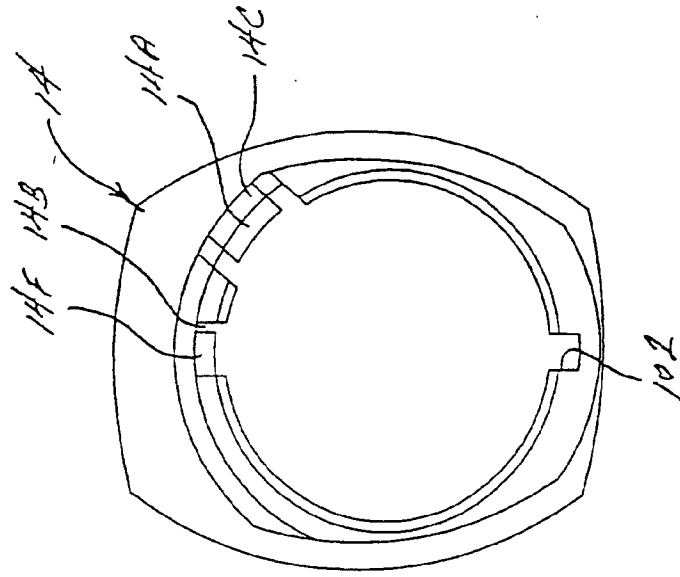


FIG-15

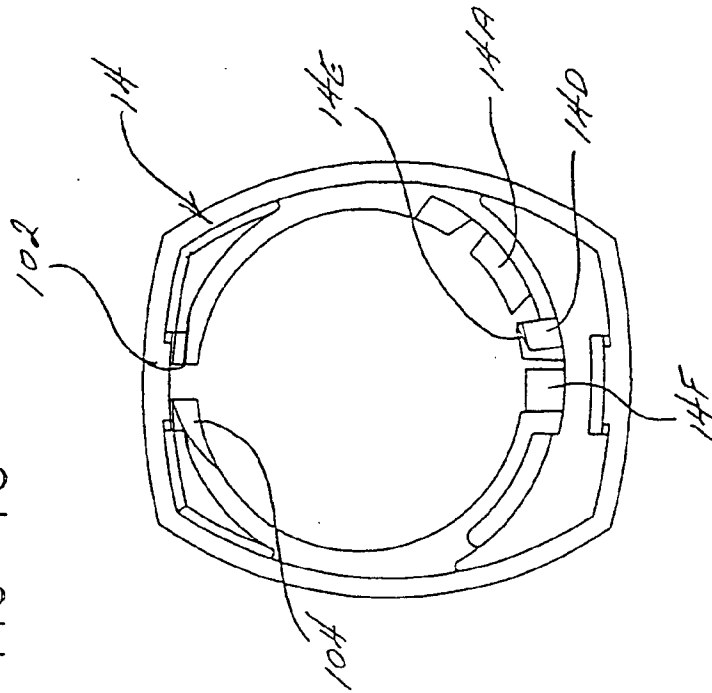


FIG-17

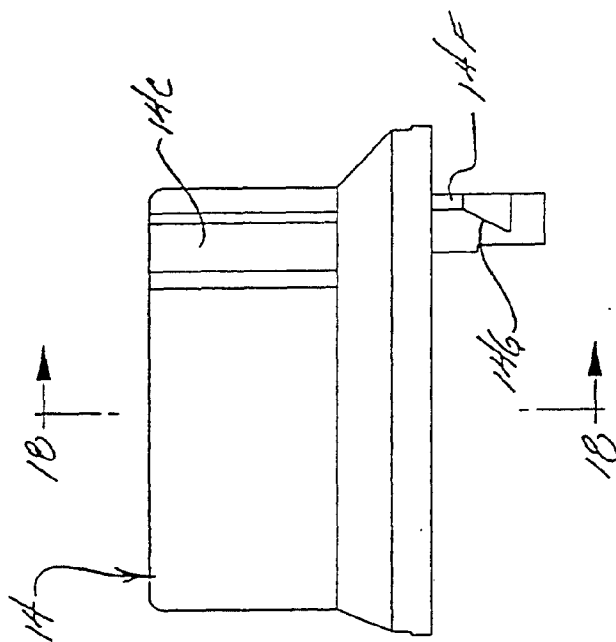


FIG-18

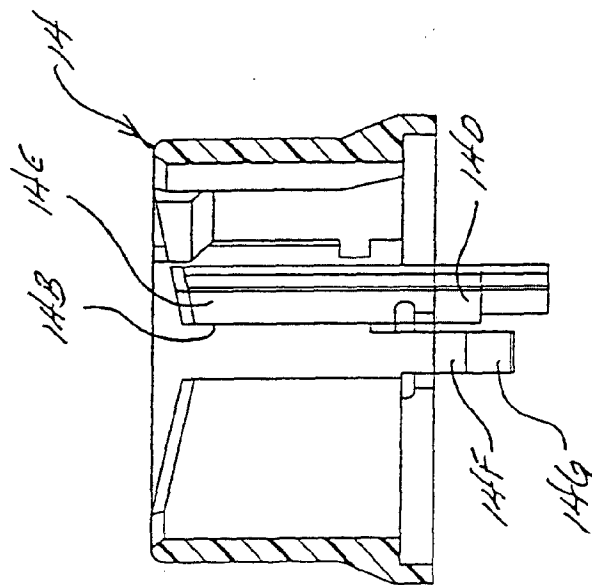


FIG-19

